

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte

Band: 64 (1991)

Artikel: Limska Draga viaduct: fabrication and erection of orthotropic plates

Autor: Androic, Boris / Dujmovic, Darko / Dumbovic, Ivan

DOI: <https://doi.org/10.5169/seals-49296>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. [Siehe Rechtliche Hinweise.](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. [Voir Informations légales.](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. [See Legal notice.](#)

Download PDF: 19.03.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>



Limska Draga Viaduct – Fabrication and Erection of Orthotropic Plates

Viaduc Limska Draga – Fabrication et montage de la dalle orthotrope

Limska-Draga-Talbrücke – Werkstattfertigung und Montage von orthotropen Platten

Boris ANDROIC

Dr. Eng.
Univ. of Zagreb
Zagreb, Yugoslavia

Darko DUJMOVIC

Civil Eng.
Univ. of Zagreb
Zagreb, Yugoslavia

Ivan DUMBOVIC

Consulting Eng.
IPZ
Zagreb, Yugoslavia

1. INTRODUCTION AND DESCRIPTION OF THE VIADUCT

The preliminary design of the Limska Draga Viaduct was made in 9 solutions. The solution chosen was the steel structure with box cross-section (Fig.1). The choice was dictated by the topography and geology of the site as well as the current economic situation. The relation between the design, fabrication, erection and quality assurance is shown on the orthotropic plate.

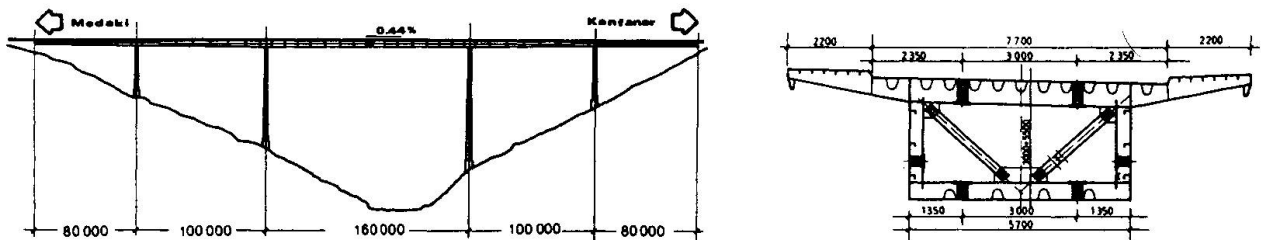


Fig.1 Longitudinal and cross-section

2. FABRICATION

The viaduct consists of 45 assemblies consisting of 8 parts each (Fig.2).

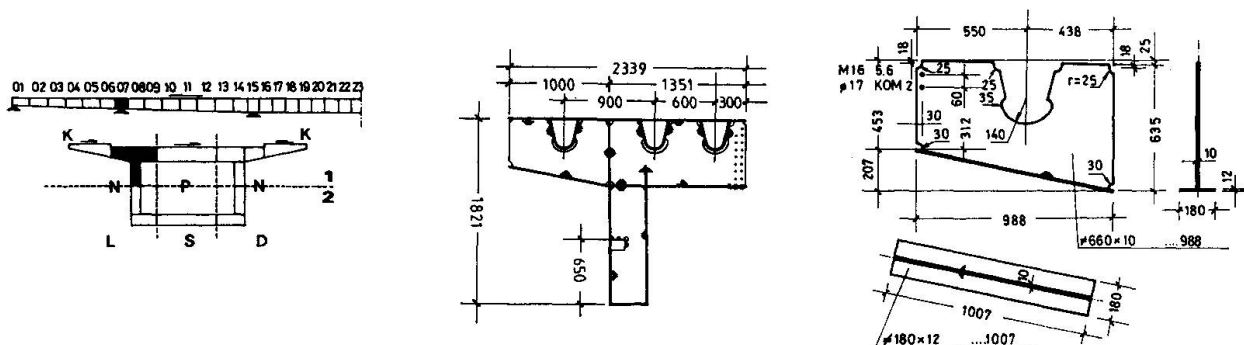


Fig.2 Assemblies

Fig.3 Computer made shop designs

Workshop designs were made by means of computer in three months and include over 2500 tons steel. The material was chosen in accordance with calculations and criteria against brittle fracture.

3. ERECTION

Erection of the assemblies was designed in a way to minimize residual stresses in the orthotropic plate welds. Temporary connection was done by conical bolts over the box ribs. This is done by means of a temporary device which carries the new assembly, which can thus be moved horizontally. The conical bolts along the

upper chord were removed and the assembly was moved 3 mm. After welding the upper ortho plate, the same procedure is repeated for the lower ortho plate.

4. QUALITY ASSURANCE

Geometrical deviations are measured during fabrication and erection. Figs.4a and 4b show deviations of longitudinal stiffeners and transversal beams in the upper orthotropic plate for assembly No 38 during pre-erection.



Fig.4 Deviations of transversal beams and longitudinal stiffeners

Quality assurance was done in all stages of construction for welding in installation of high strength bolts, etc. Special attention was paid to non-destructive determination of mechanical properties of welded joints by measuring their hardness. Fig.5 and 6 present the results of hardness of shop and site welds.

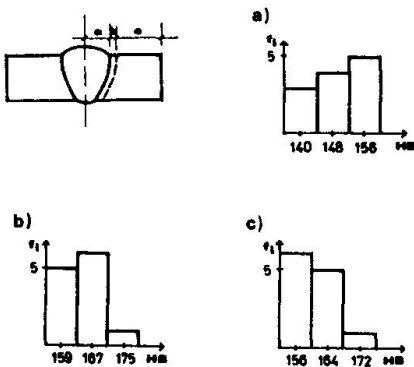


Fig.5 Shop weld

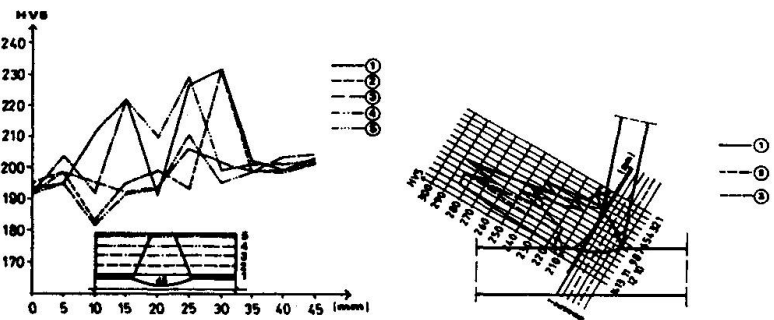


Fig.6 Site welds

The arrangement of hardness intensities are important for the assessment of the welds mechanical properties.

5. FATIGUE ASSESSMENT

Fatigue in an orthotropic plate is analyzed by estimation of traffic, by selecting details of higher fatigue strength and by assessing the location of longitudinal rib splice. Average daily passage of equivalent vehicles is $n=1200$.

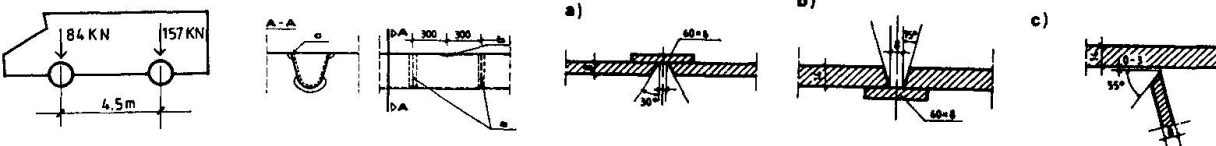


Fig.7 Fatigue assessment

6. CONCLUSION

Bearing in mind the interdependence of design, fabrication and erection of the presented orthotropic plate, together with adequate quality assurance, an effective interaction of design and construction technology has been achieved.